

## PRODUCT No. 7241

### Comb with hooks for hanging belt curtain



(Illustrative photograph)

#### Technical data

Material (hook)	Stainless steel
Width of comb with hooks	984 mm

#### Attributes

- Protective curtains are used for indoor and outdoor temperature partition of rooms.
- It is possible to use lower suspension curtains and frontal curtain suspension.
- For the installation, it is necessary to know the exact dimensions of the door opening.
- The hooks are hanged on hinges with a standard size of 300 mm.
- Hinge can overlap on both sides – the comb should be slightly shorter than the door opening.
- Curtains of 300 mm length can overlap 10 mm on each side.
- It is possible to hang the curtains so that the individual curtains overlaps.
- Hinges are made slightly larger to ensure proper insulation.

#### Product purpose

- Designed for hanging belt curtains.

#### Additions

Selection of components to order:

7238	Standard curtain	(Width – 300 mm, Thickness – 2 mm, Winding – 50 m).
7239	Temperature-resistant curtain	(Width – 300 mm, Thickness – 3 mm, Winding – 50 m).
7240	Hinge with mesh – 5 pcs	(Width – 300 mm).
7241	Comb with hooks	(Width – 984 mm).


#### Use

**Suspension:**

Lower suspension



Frontal suspension

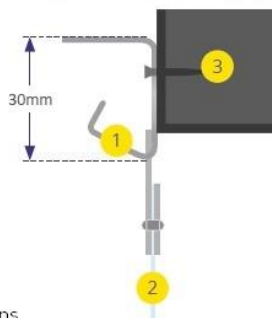


- Descriptions
1. Stainless hook
  2. PVC curtain
  3. Doors frame, masonry

**Warning:**

The last curtain on both sides can hang off the comb with hooks. This means that the comb should be slightly shorter than the width of the door opening and the curtains. The 300 mm comb for curtain will be 10 mm shorter on both sides.


300 mm curtain - Minimal gap - 10 mm

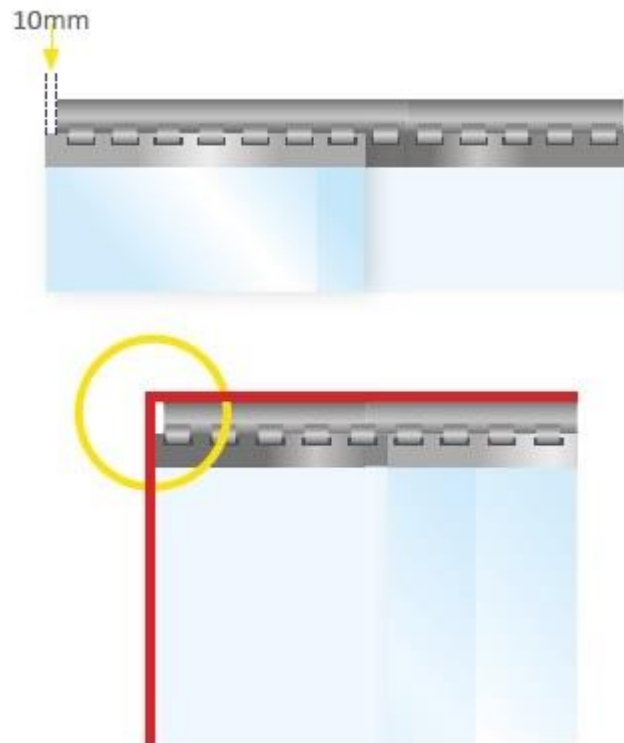

**Overlap possibility:**


Minimal overlap - 35 %

- A. Overlap on 1 hook of first and second belt.
- B. Five free hooks between each belt.
- C. Overlap. Totally 104 mm.

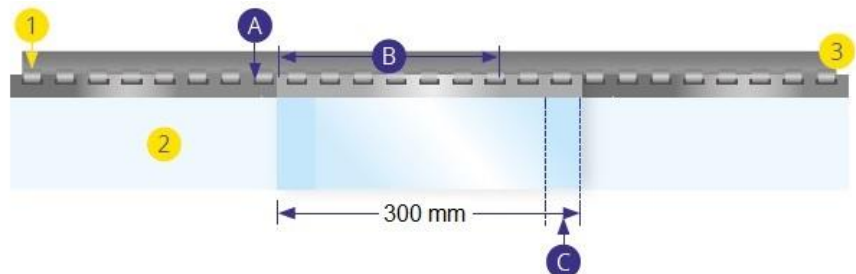

Medium overlap - 64 %

- A. Overlap on 2 hooks of first and second belt.
- B. Three free hooks between each belt.
- C. Overlap. Totally 162 mm.

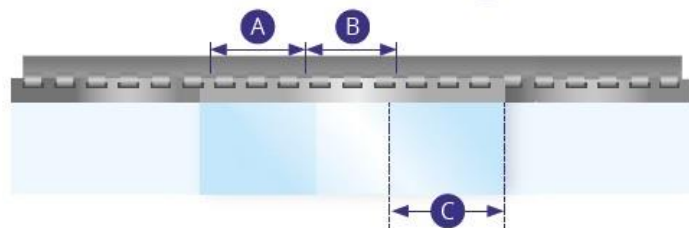

Maximal overlap - 90 %

- A. Overlap on 3 hooks of first and second belt.
- B. One free hook between each belt.
- C. Overlap. Totally 135 mm.

