

### PRODUCT No. 7589


#### Wall mounted eye shower with manual activation - plastic



(Illustrative photograph)

#### Technical data

Material (sink/connection parts)	Polypropylene / brass
Controlled flow rate	14 l/min. +/-10% (0,3 MPa)
Inlet	1/2"
Drain	1.1/4"
Recommended water temp. (Min./Max.)	15° - 35°
Required water pressure (Min./Max.)	0,2 MPa – 0,5 MPa
Sink diameter	260 mm
Total height	284 mm

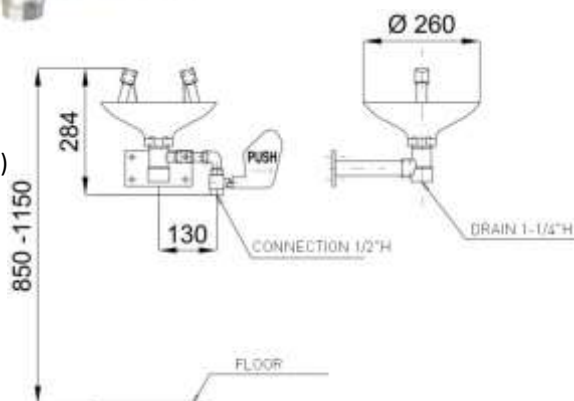

#### Attributes

- The sink is made of polypropylene (PP) plastic. The connecting parts are made of brass.
- Ergonomically located eye heads provide a gentle, even and wide flow of water during the rinsing process.
- The eye wash heads are equipped with light dust covers, which are released immediately when used.
- Designed for operations with hazardous substances and the risk of contact with eyes.
- Effective first aid when burned, burned by acid or scalded.
- The eye shower is triggered by a mechanism with chrome / nickel valve.
- The shower is firmly installed to the wall.
- The tubes are made of galvanized steel and subsequently epoxy prime coated.
- Manufactured in accordance with EN 15154-1, EN 15154-2, UNI 9608, UNI 10271 and DIN 12 899.

#### Color variations

- Green (RAL 6029).

#### Product purpose

- Designed for operations where hazardous substances are used and is there a risk of injury to eyes.

#### Additions

- Can be delivered in version with stainless sink – type 7590.